


## RO Membrane Housing Series

### Features

- 100% virgin materials - polypropylene
- Single top mounted O-ring design prevents O-ring pinching and leaks
- No talc or other chemicals added ensuring housings are sterile and hygienic
- No injection molding releasing agents used in manufacturing
- O-ring free of nitrosamines
- Round cap version available upon request

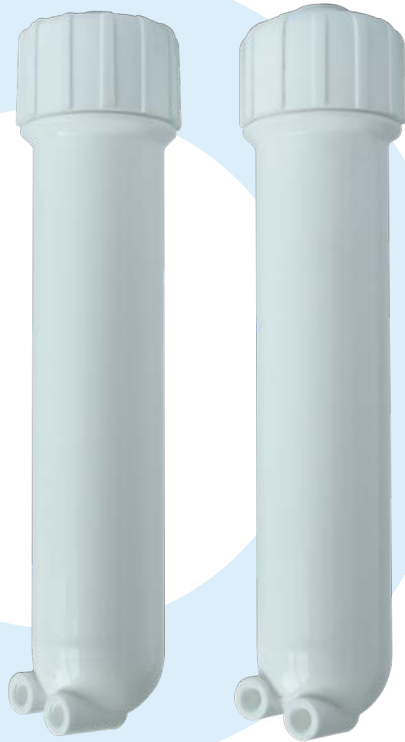

Custom-designed for the world's leading RO system integrators and assemblers, GWS membrane housings are the ideal choice for makers of NSF-compliant RO systems for global markets.

With two connection sizes for easy integration, GWS housings are compatible with all of the industry's leading RO membranes, ensuring the safest, cleanest drinking water for your customers.

### Models

Model Number	Connection	Cap Design	Cap Color	Sump Color	Box qty
H10-1C-WW	1/8" compatible connection	Flat Cap	White	White	24
H10-2C-WW	1/4" compatible connection	Flat Cap	White	White	24

### Specifications

Product Series Name	RO Membrane Housing Series
Material	O-ring: Buna-N Cap: 100% virgin polypropylene Sump: 100% virgin polypropylene
Min. Operating Temperature	4°C / 40°F
Max. Operating Temperature	40°C / 104°F
Max. Operating Pressure	8.6 bar   125 psi

Where Water Gets Better